

# Sight Glass -Tubular Type

with Indication- and Non-Return-Ball  
with Safety Seal-System (acc. to DIN 28121)

# NORIS

## Bauform 25-B

### Application:

Sight glass - Tubular type with DIN-flanges on both sides to use in vertical pipe lines for optical control of fluids and gasses. If the fluid starts flowing, the indicatorball begins to suspense. The design of the ballseat allows the ball to work like a check valve.

### Operating conditions:

Connection: Flanges PN 10/16  
Pressure: 6 bar max.  
Temperature: 200°C max.

### Installation:

Vertical.  
Take care of flow direction from bottom to top

### Spezial designs:


Material Steel  
Hollow-ball possible (3 bar max.)

### Materials:

Flanges	WN 1.4571
Screws	A4-70
Glass tube	Borosilicate glass
Ball + Seats	PTFE
Gaskets	PTFE covered

### Ordering example:

Sight Glass - Tubular Type Bauform 25-B  
WN 1.4571; 6 bar / 200°C  
DN 50, PN 16

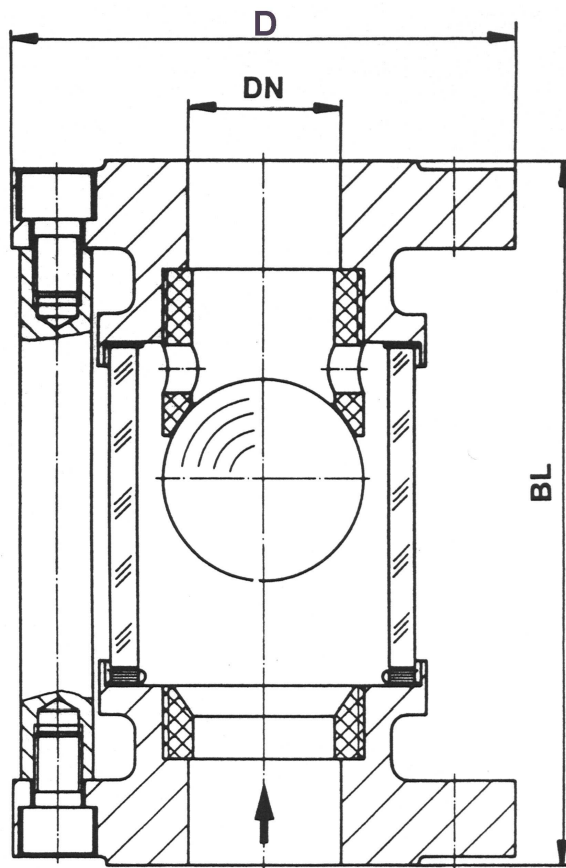

### Dimensions:

DN	D	BL
25	115	160
40	150	200
50	165	230
80	200	310
100	220	350

### Mounting instructions:

*Sight glass tubular type must be mounted without tension by tube, vibrations and pressure pushes.*

Modification reserved

# NORIS ARMATUREN Burkenstein GmbH & Co. KG

Puscherstrasse 3  
D-90411 Nürnberg

Telefon: +49 (0) 911 / 52 150 63  
Telefax: +49 (0) 911 / 52 24 40

Internet: [Noris-Armaturen.de](http://Noris-Armaturen.de)  
E-Mail: [Noris@Noris-Armaturen.de](mailto:Noris@Noris-Armaturen.de)