

Sight Flow Indicators (straight line) with heating jacket

NORIS

Bauform 880-HM

Application:

To keep cold- or heat- loss at sight flow indicators as low as possible, they are surrounded with a heating jacket. Within the resulting cavity, a corresponding medium can flow to avoid cold- or heat- loss.

Dimension:

Body corresponds Bauform 880
Measures see at Bauform 880
With DIN- and ANSI - Flanges
All dimensions and all pressures

Materials:



Body:	WN 1.4408
Heating jacket:	WN 1.4571

Connections for heating jacket:

Buttweld ends
Inside or outside thread
Flange connection
Screwing

Standard design:

Inside thread acc. to sketch

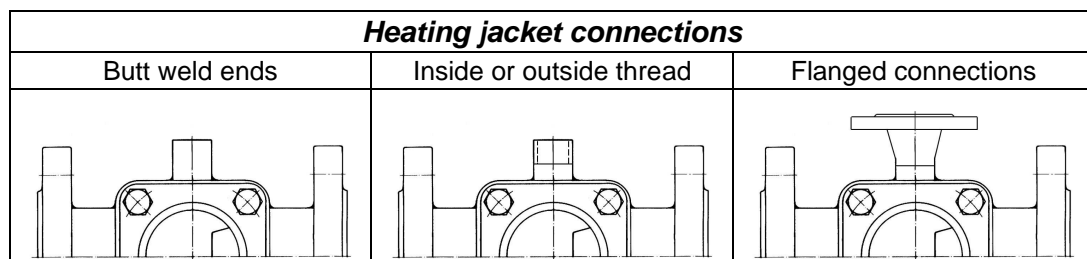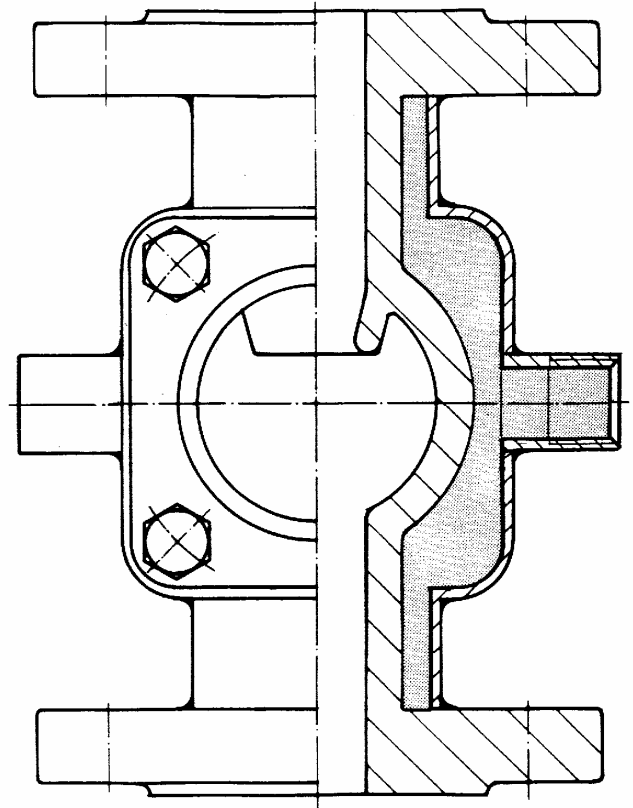

Modification reserved

NORIS ARMATUREN Burkenstein GmbH & Co. KG

Puscherstrasse 3
D-90411 Nürnberg

Telefon: +49 (0) 911 / 52 150 63
Telefax: +49 (0) 911 / 52 24 40

Internet: Noris-Armaturen.de
E-Mail: Noris@Noris-Armaturen.de