

Accessories

Nipple / Coupling

NORIS


Series 820 / 821



High pressure grease nipple
HFN 820.01.700

max. working pressure: 700 bar
wrench size: SW 11
Thread: NPT 1/8"

Ordinary grease nipples are not applicable for high working pressure.
Conical capped end and spanner flat are inductive hardened and the complete high pressure nipple is copper plated.
Before use thread should be wrapped with TEFLON stripe.

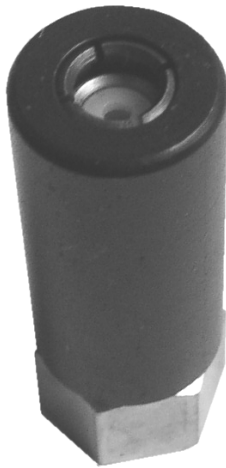

High pressure grease coupling
HFK 821.01.700

max. working pressure: 700 bar
wrench size: SW 14
Thread: M 10 x 1

The 4- part claw allows easy connecting and disconnecting and preserves the high pressure grease nipple.
Up to inclination to 12° degree between nipple and coupling there ist 100% density.

NORIS

ARMATUREN BURKENSTEIN GMBH & CO. KG
– ABTEILUNG SPANNELEMENTE –

D-90411 Nürnberg
Puscherstraße 3

Telefon: + 49 (0) 911/ 52 15 06 3
Telefax: + 49 (0) 911/ 52 24 40

E-Mail: noris@noris-armaturen.de
Internet: www.noris-armaturen.de