

# Slice screen strainer

# NORIS

## Bauform 146

### Application:

Slice screen strainer as intermediate flange construction to use as a starter strainer. Preferably installed for safety in front of measuring instruments, control valves, pumps and sensitive systems.

*Only by flange connection applicable*

### Operating conditions:


Nominal pressure: max. 16 bar

### Installation:

Optional; between flanges

### Options:

Special mesh sizes

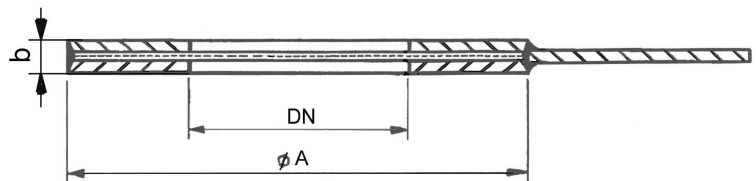

### Materials:

Clamping ring	WN 1.4571
Screen	WN 1.4401

### Ordering example:

Slice screen strainer, Bauform 146  
Stainless steel; mesh size 1,0 mm  
DN 50 PN 16

### Dimension:

DN	Ø A	b
15	45	7 ±1
20	58	
25	68	
32	78	
40	88	
50	102	
65	122	
80	138	
100	158	
125	188	
150	212	
200	268	
250	320	



Modification reserved

# NORIS ARMATUREN Burkenstein GmbH & Co. KG

Puscherstrasse 3  
D-90411 Nürnberg

Telefon: +49 (0) 911 / 52 150 63  
Telefax: +49 (0) 911 / 52 24 40

Internet: [Noris-Armaturen.de](http://Noris-Armaturen.de)  
E-Mail: [Noris@Noris-Armaturen.de](mailto:Noris@Noris-Armaturen.de)