

# Sight Flow Indicators (straight line) with Spinner

with **flanged** connection acc. to **ANSI - 150 / 300 lbs**

# NORIS

Bauform 880-A-RK  
Bauform 880-A-RP

## Application:

The flow indicators are used for optical control of fluids and gases, for horizontal and vertical pipe lines.

## Operating conditions:

Working pressure: 16 bar by 150 lbs  
40 bar by 300 lbs  
Working temperature: 120°C or 260°C

## Installation:

Optional. Take care of flow direction

## Options:

with - Heating jacket  
- Sight glass light - fitting

## Materials:

**Cast Iron** GG 25 (EN-GJL-250) max. 16bar  
**Cast Steel** GS-C 25 (1.0619 / GP240GH)  
**Stainless Steel** WN 1.4408


Body	GG 25	GS-C 25	1.4408
Covers	GG 25 / S235JRG2	GS-C 25 / S235JRG2	1.4408 / 1.4301
Screws	4.6 / 5.6 gal.		A4-70
Glass	Borosilicate glass DIN 7080 Soda-lime glass DIN 8902		
Gaskets	Graphite, ( or other materials )		
Spinner	Plastic up to 120°C; <b>Bauform 880-A-RK</b> PTFE up to 260°C; <b>Bauform 880-A-RP</b>		

## Certificate: ( Option )

Acc. to EN 10204-2.2 or 3.1

## Ordering example:

Sight Flow Indicators with Spinner; Bauform 880-A-RP  
GS-C 25, PTFE-Spinner  
Borosilicate glass DIN 7080-16 bar  
ANSI 2"; 150 lbs

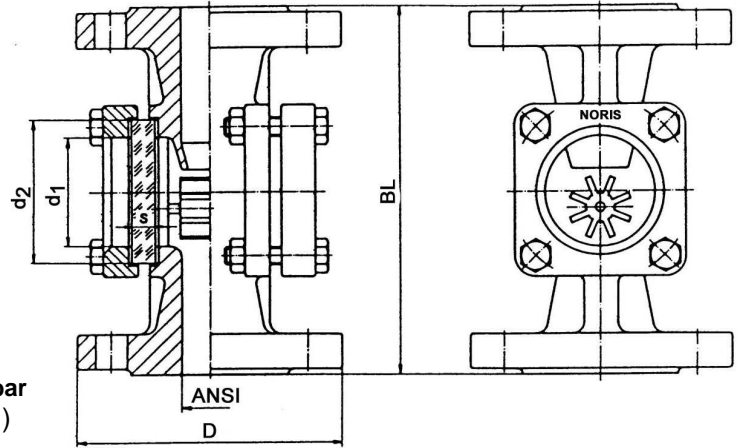

## Dimensions:

ANSI	D		BL (DIN F1)	d <sub>1</sub>	Glass plate		
	150 lbs	300 lbs			d <sub>2</sub>	S	
					16 bar	40 bar	
1/2"	89	95,2	130	32	45	10	10
3/4"	98	117,3	150	32	45	10	10
1"	108	123,8	160	48	63	10	15
1 1/4"	118	133,4	180	48	63	10	15
1 1/2"	127	155,6	200	65	80	12	20
2"	152	165,1	230	80	100	15	25
2 1/2"	178	190,5	290	80	100	15	25
3"	191	209,6	310	100	125	20	30
4"	228 *	254,0	350	125	150	25	32
5"	254 *	279,4	400	150	175	25	a.A.
6"	279	317,5	480	175	200	30 **	a.A.
8"	343 *	381,0	600	175	200	30 **	a.A.

\* by cast iron different diameter by D acc. to DIN

\*\* 16 bar only with borosilicate glass possible

Modification reserved

# NORIS ARMATUREN Burkenstein GmbH & Co. KG

Puscherstrasse 3  
D-90411 Nürnberg

Telefon: +49 (0) 911 / 52 150 63  
Telefax: +49 (0) 911 / 52 24 40

Internet: Noris-Armaturen.de  
E-Mail: Noris@Noris-Armaturen.de